



ARGOX OS-2130D  
Thermal Printer  
(optional)


## Features

- **Applications:** OIML & EC Type approved, Legal for Trade Application  
Stores, catering, intend to be used for direct sales to the public
- **Loadcell:** Single Alum. load cell, resolution up to 1/7,500
- **Construction:** Removable stainless steel weighing platter for convenient cleaning  
Rugged ABS housing provides years of service  
Heavy duty X-shaped cast Alum. load cell bracket  
Equipped with adjustable feet and leveling bubble for quick set-up and stability
- **Indicator:** Large and easy-to-read LCD display with white backlight  
25 keys: on/off, print, enter, clear, tare, unit, zero, save, RC.PLU, ST.PLU, M1-M5, 0-9
- **Functions:** 265 PLU, includes 5 PLU hot keys  
PLU remembers Name, Ingredients, Life, Unit price, Item code  
Convenient programmable software for downloading and uploading PLUs  
Available to connect an external printer (Argox OS-2130D) for printing labels

## Specifications


Item	Parameters			
Model	EHC-PF-6	EHC-PF-15	EHC-PF-30	EHC-PF-30D
Capacity	6kgx0.002kg	15kgx0.005kg	30kgx0.01kg	0-15kgx0.005kg / 15-30kgx0.01kg
Units of Measure	kg, g, lb:oz			
Display	3 windows, 6 digits/window, 0.73" (18.5mm) high, 7 segments LCD display with white backlight			
Power	12V DC 500mA adapter, 6V 4Ah lead-acid rechargeable battery			
Serial Port	RS232, USB			
Operation Temp	-10°C to 40°C (14°F to 104°F)			
Platform size	335x225mm / 13.19"x8.86"			
Packing size	950x450x520mm/4pcs			
Shipping Weight	G.W.: 25kg N.W.: 23kg			
Approvals	OIML, CE and WEEE directive, UL/CE/BSVI Energy approved power adapter			
Options	RS232 / USB cable, ARGOX OS-2130D printer			

## Dimensions (mm/inch)

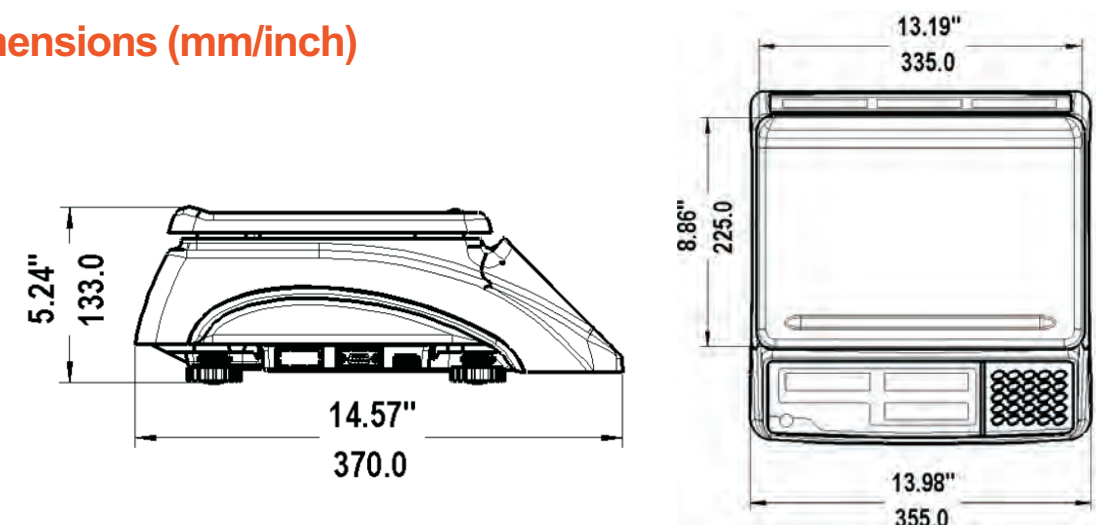

- **OIML & EC Type Approved**  
OIML Cert. No.: R76/2006-NL1-16.08  
EC Type Cert. No.: T8556

- Up to 265 easy-to-add PLUs for quick reference

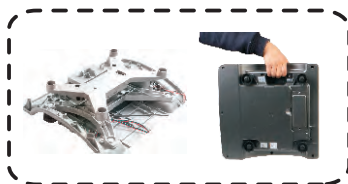

- Heavy-duty aluminum frame can support loads up to 60kg
- Integrated carry handle for easy portability



- Standard RS232 & USB serial ports provide label printer (Argox OS-2130D) or PC connectivity
- Programmable software for uploading / downloading PLUs