

Multi-Functional




Features

- **Applications:** Warehouse, Shops, Stores, or other industrial and commercial weighing
- **Loadcell:** High Precision Single Alum. load cell makes system resolution up to 1/30,000
- **Construction:** Rugged ABS housing provides years of service
Removable stainless steel weighing platform for convenient cleaning
Large die-cast Alum. load cell bracket for safe loading
Level bubble and adjustable feet ensure quick set-up and stability
- **Indicator:** FSTN LCD display with backlit, clear to see in any angle of view
20 keys: ESC/On/Off, Zero, Unit, Print, Acc, Tare, Clear, Func., %, Limit and 0-9
- **Functions:** **Weighing, Counting, Percent weighing, Accumulation**
Data Compare (in weighing, counting and percent mode) and dedicated annunciators


Specifications

Item	Parameters			
Model	EHC-W-3	EHC-W-6	EHC-W-15	EHC-W-30
Capacity	3kgx0.1g 6lbx0.0002lb	6kgx0.2g 15lbx0.0005lb	15kgx0.5g 30lbx0.001lb	30kgx1g 60lbx0.002lb
Units of Measure	kg, g, lb, oz			
Display	1-window 6 1/2 digits, 25mm (1") high, 7 segments FSTN LCD display with backlit			
Power	12V 500mA adapter or 6V 4Ah lead-acid rechargeable battery			
Serial Port	RS232			
Operation Temp	-10°C to 40°C (14°F to 104°F)			
Platter	297mm(W)x227mm(L) / 11.69"(W)x8.94"(L)			
Packing	720x410x390mm/4pcs/ctn			
Shipping Weight	G.W.: 23kg N.W.: 21kg			
Approvals	CE and WEEE directive, UL/CE/BS/VI Energy approved power adapter			
Options	RS232 cable			

Dimensions (mm/inch)

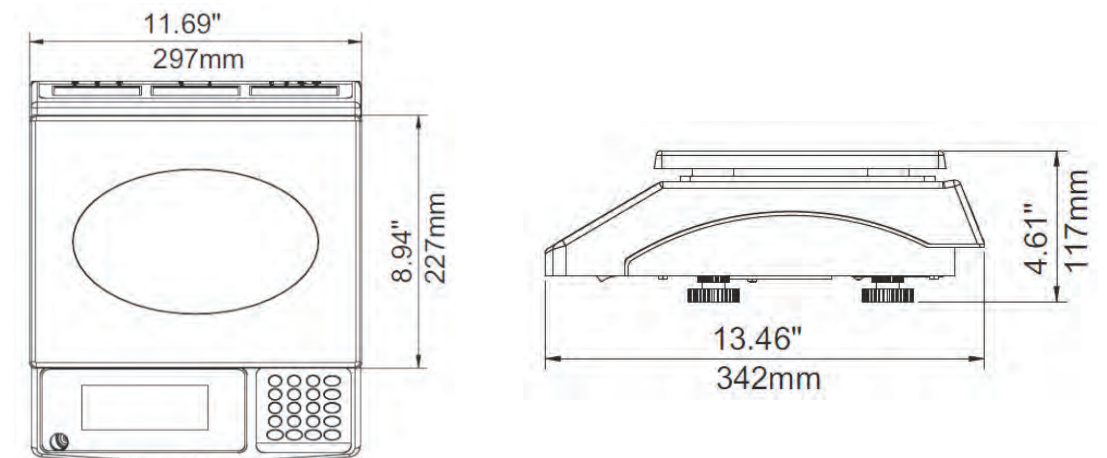

- Large FSTN LCD display with backlit, clear to see from any angle of view
- 20 keys operation allows fast access to functions of: Weighing, Counting, Percent, Check-Weighing, Accumulation

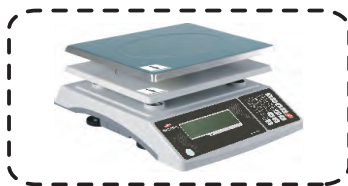

- Two-layer weighing platters: Plastic platter and stainless steel platter



- Standard Bi-directional RS232 serial port provides label printer or PC connectivity