

Multi-Functional Up to 60KG Capacity




Features

- **Applications:** Warehouse, Shops, Stores, or other industrial and commercial weighing
- **Loadcell:** High precision single Alum. load cell makes system resolution up to 1/30,000
- **Construction:** Rugged ABS housing provides years of service
Removable stainless steel weighing platform for convenient cleaning
Heavy-duty cast Alum. load cell bracket offers large load up to 60kg
Level bubble and adjustable feet ensure quick set-up and stability
- **Display:** 2" (50mm) high backlit LCD display
25 keys: on/off, zero, tare, G/N, enter, %, clear, hi/lo, unit, acc, pcwt, spl, print, 0-9
- **Functions:** **Weighing, Counting, Percent weighing, Accumulation**
Data Compare (in weighing, counting and percent mode) and dedicated annunciators


Specifications

Item	Parameters			
Model	EHC-WF-6	EHC-WF-15	EHC-WF-30	EHC-WF-60
Capacity	6kgx0.2g 15lbx0.0005lb	15kgx0.5g 30lbx0.001lb	30kgx1g 60lbx0.002lb	60kgx2g 120lbx0.005lb
Units of Measure	kg, g, lb, oz			
Display	1-window 50mm (2") high, 6 1/2 digits, 7 segments LCD display with backlight			
Serial Port	Standard Bi-directional RS232; USB			
Power	12V 500mA power adapter or 6V 4Ah lead-acid rechargeable battery			
Operation Temp	-10°C to 40°C (14°F to 104°F)			
Platter	335mm(W)x225mm(L) / 13.2"(W)x8.9"(L)			
Packing	500x500x400mm/2pcs/ctn			
Shipping Weight	G.W.: 10.5kg N.W.: 7kg			
Approvals	CE and WEEE directive, UL/CE/BS/VI Energy approved power adapter			
Options	RS232 cable, USB cable			

Dimensions (mm/inch)

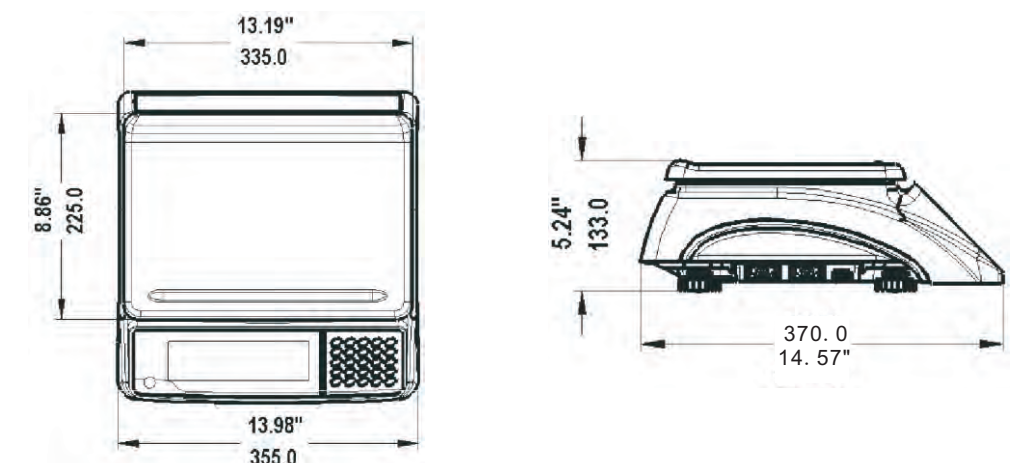

- 2" (50mm) high large LCD display with backlit
- 25 keys operation, with Weighing, Counting, Percent Weighing, Check Weighing, Accumulation, G/N functions

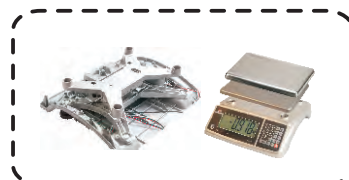

- Double-layer weighing platters and heavy-duty cast Aluminum load cell bracket for safe loading
- Larger sized weighing platter is more convenient for weighing big objects



- Bi-directional RS232 interface and USB port, allow to communicate with computer or other devices