


Features

- **Applications:** Mail room, Shipping and receiving, home office, general commercial weighing
- **Loadcell:** 4 Aluminium load cells, resolution up to 1/3000
- **Construction:** Ultra low profile punched steel base with stainless steel platform
3m coiled cable for durability and easy extension
Four spring feet for self-centering and quick stability
Portable design for easy movement to different locations
- **Indicator:** Stainless steel housing
FSTN LCD display with backlit, clear to see in any angle of view
Optional desk bracket and flexible wall mounting
- **Functions:** Weighing, Hold, Tare, Auto-Off function


Specifications

Item	Parameters		
Model	PS-101-60	PS-101-120	PS-101-180
Capacity	60kgx0.02kg	120kgx0.05kg	182kgx0.1kg
	130lbx0.05lb	250lbx0.1lb	400lbx0.2lb
Units of Measure	kg, lb, lb:oz		
Display	5 1/2 digits 0.65" high LCD display with backlit		
Serial Port	RS232		
Power	9V 600mA adapter or 4xAAA batteries		
Operation Temp	-10°C to 40°C (14°F to 104°F)		
Platform Size	380mm(L)x305mm(W) / 14.96"(L)x12.01"(W)		
Packing	520x490x340mm/4pcs/ctn		
Shipping Weight	G.W.:22kg N.W.:20kg		
Approvals	CE and WEEE directive, UL/CE/BS/VI Energy approved power adapter		
Options	RS232 cable, wall and desk brackets		

Dimensions (mm/inch)

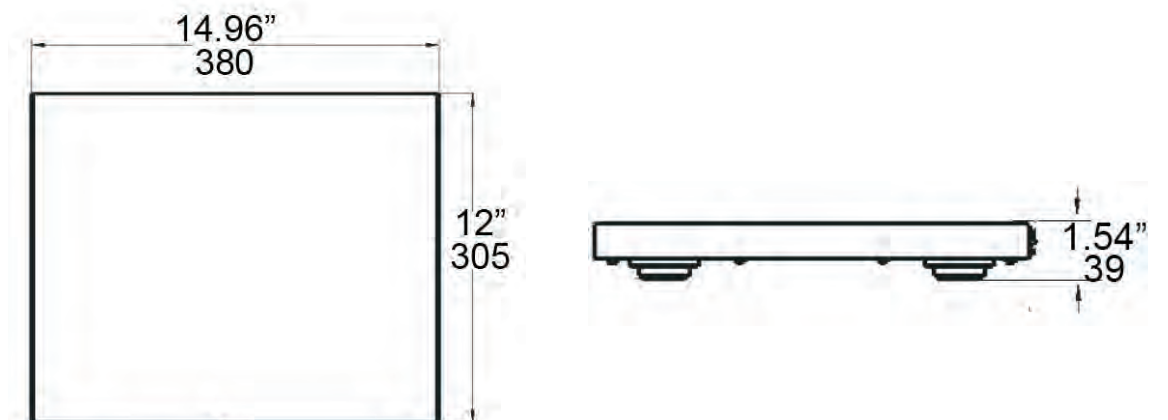

- **FSTN LCD with backlit**, clear to see from any angle of view
- Optional desk bracket and flexible wall mounting

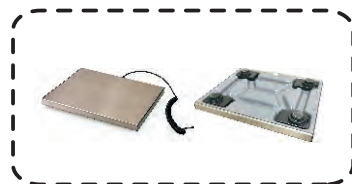

- Low profile base, equipped with 4 high precision Alum. load cells
- Coiled cable (extension length:3m) for easy extension
- Extra black anti-slip rubber mat for option



- Bi-directional RS232 interface, allows to communicate with computer