




## Features

- **Applications:** Shipping and receiving, warehouse, livestock, general purpose weighing
- **Loadcell:** Four planar beam load cells, resolution up to 1/3,000
- **Construction:** Ultra low profile mild steel base  
Constructed with heavy duty welded steel channels  
Four adjustable leveling feet offers quick stability  
Large and easy-to-clean stainless steel platform
- **Indicator:** Rugged ABS housing  
LCD display with backlit  
4 keys: ZERO/ON/OFF, TARE, UNIT, PRINT/HOLD
- **Functions:** Weighing, TARE, Hold, Auto-off function

## Specifications

Item	Parameters	
Model	PS-102-75	PS-102-200
Capacity	75kgx0.05kg / 165lbx0.1lb	200kgx0.1kg / 440lbx0.2lb
Units of Measure	kg, lb	
Display	5 1/2 digits, 0.65" (16.51mm) high, 7 segments LCD display with optional backlit	
Serial Port	USB	
Power	9V 600mA adapter or 1x9V battery	
Operation Temp	-10°C to 40°C (14°F to 104°F)	
Platform size	400x500mm / 15.75"x19.69"	
Packing size	640x530x250mm/2pcs/ctn	
Shipping Weight	G.W.: 20kg N.W.: 18kg	
Approvals	CE and WEEE directive, UL/CE/BS/VI Energy approved power adapter	
Options	USB cable	

## Dimensions (mm/inch)

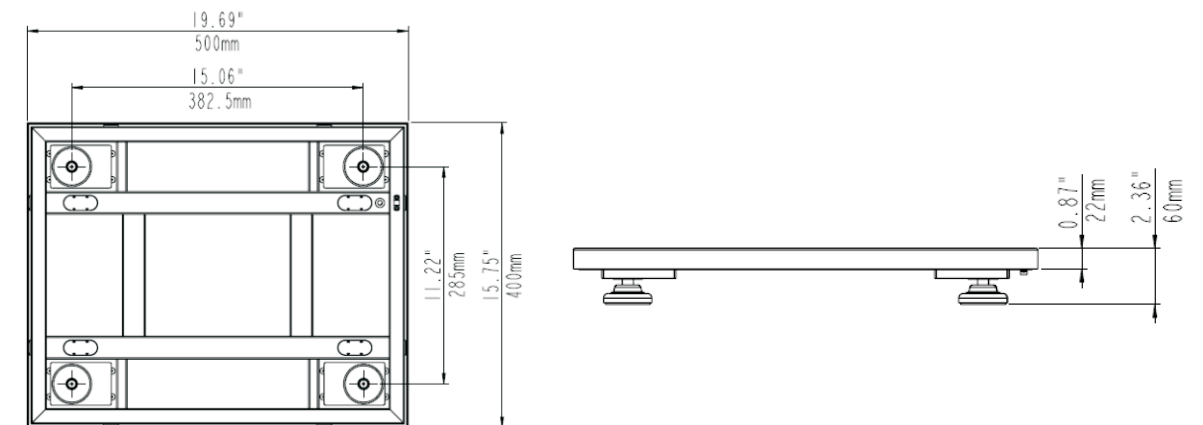

- **FSTN LCD with backlit**, clear to see from full angle of view
- 4 keys for easy operation, with HOLD function



- Low profile platform, base in heavy-duty welded structure
- Equipped with four-point high precision Alum. load cells



- USB serial port, allows to communicate with computer or other devices