

*Make your weighing colorful*



Orange



Black

Blue

Red

Grey


## Features

- **Applications:** Shipping and receiving, warehouse, livestock, general purpose weighing
- **Loadcell:** 4 steel load cells
- **Construction:** Durable checked steel platform  
Rugged ABS lower base  
3m coil cable from base to indicator for durability and easy extension
- **Indicator:** Rugged ABS housing  
Easy-to-read LCD display with optional backlit  
4 keys: ZERO/ON/OFF, TARE, UNIT, HOLD
- **Functions:** Weighing, Tare, Hold, Auto-off function

## Specifications

Item	Parameters	
Model	PS-103U-150	PS-103U-400
Capacity	68kgx0.1kg / 150lbx0.2lb	200kgx0.2kg / 400lbx0.5lb
Units of Measure	kg, lb	
Display	5 1/2 digits 0.65" (16.51mm) high, 7 segments, LCD display with optional backlit	
Serial Port	Optional USB	
Power	9V 600mA adapter or 1x9V battery	
Operation Temp	-10°C to 40°C (14°F to 104°F)	
Platform size	305x305mm / 12"x12"	
Packing size	600x560x410mm/6pcs/ctn	
Shipping Weight	G.W.: 28kg N.W.: 25kg	
Approvals	CE and WEEE directive, UL/CE/BS/VI Energy approved power adapter	
Options	USB port and cable, backlit	

## Dimensions (mm/inch)

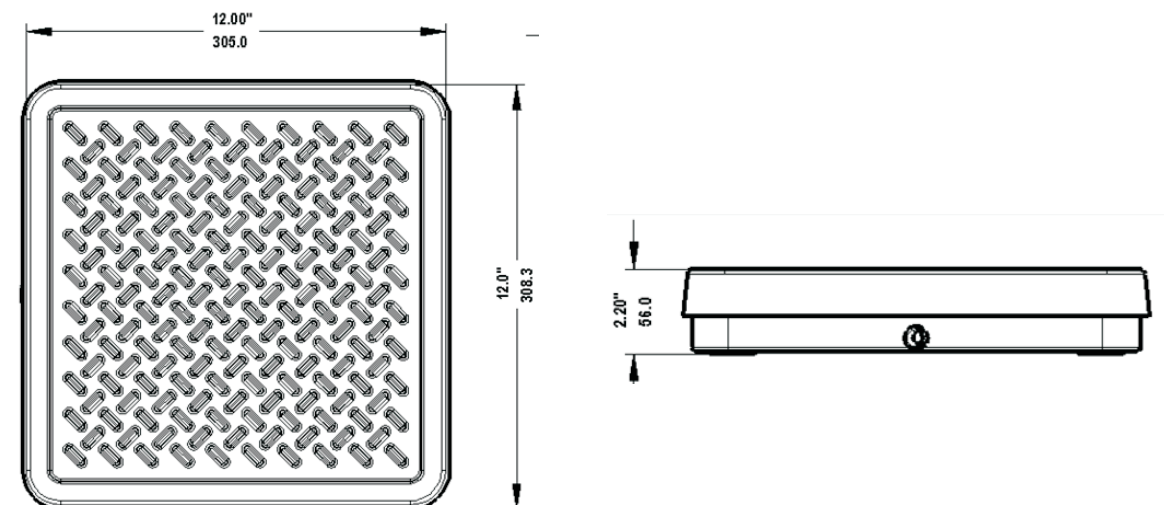

- Easy-to-read LCD display with optional backlit



- Complete-sealed and heavy-duty structure afford up to 200kg/400lb
- Coiled cable (extension length: 3m)
- A variety colors available, makes your weighing colorful



- Optional USB serial port, provides PC or other devices connectivity