




Features

- **Applications:** Shipping and receiving, warehouse, livestock, general purpose of weighing
- **Loadcell:** Single point alum. loadcell, resolution up to 7,500
- **Construction:** Powder coated mild steel understructure with stainless steel platform
Equipped with shipping screw to protect the load cell against damage during transportation
Adjustable feet for quick set-up and stability
3m coil style loadcell cable for durability and easy extension
- **Indicator:** Stainless steel housing indicator
FSTN LCD display with backlit, clear to see in any angle of view
3 operation keys: ON/OFF/ZERO, UNIT/HOLD, TARE
Optional wall bracket and desk mount
- **Functions:** **Weighing, Tare, Hold and Auto-off functions**

Specifications

Item	Parameters		
Model	PS-105-30	PS-105-60	PS-105-120
Capacity	30kgx5g	60kgx10g	120kgx20g
	66lbx0.01lb	130lbx0.02lb	250lbx0.05lb
Units of Measure	kg, lb, lb:oz		
Display	5 ½ digits, 16.5mm (0.65") high, 7 segments LCD display with backlit		
Serial Port	RS232		
Power	9V 600mA adapter or 4xAAA batteries		
Operation Temp	-10°C to 40°C (14°F to 104°F)		
Platform Size	305mm(L)x305mm(W) / 12"(L)x12"(W)		
Packing	550x550x400mm/6pcs/ctn		
Shipping Weight	G.W.: 26kg N.W.: 24kg		
Approvals	CE and WEEE directive, UL/CE/BS/VI ENERGY approved power adapter		
Options	RS232 cable; wall bracket, desk bracket		

Dimensions (mm/inch)

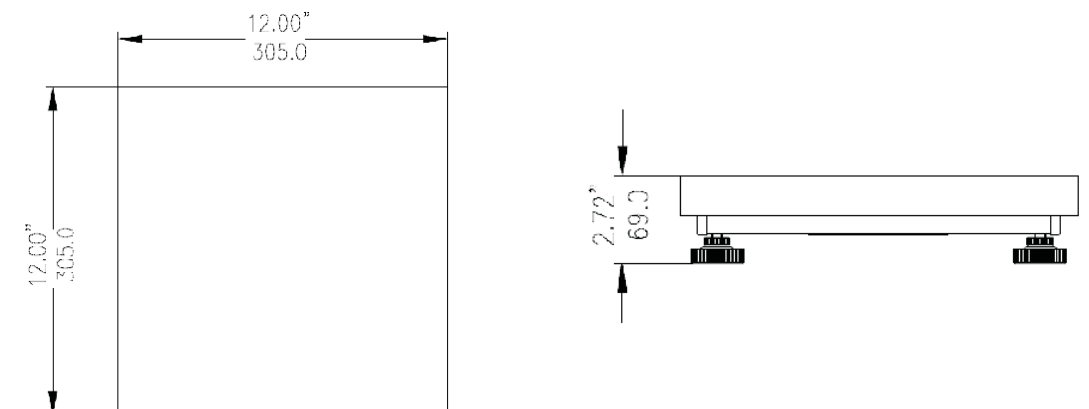

- **FSTN backlit LCD**, clear to see from any angle of view
- Optional desk bracket and flexible wall mounting



- Heavy duty structure with SS platform
- Adjustable feet for stable and precise weighing



- Bi-directional RS232 interface, allows to communicate with computer